

Single-Flavor Pressurized Shake Freezer with Refrigerated Cabinet


SU412



U412 Model

- Mix pump injects the precise amount of air into your mix, providing consistent overrun to ensure maximum profitability.
- Clean-in-place simplicity of pump reduces labor.
- Maintains high production capacity in high temperature conditions.
- Provides greater reliability and quieter operation with Stoelting's high efficiency evaporator and Scroll™ compressor.
- Refrigerated mix storage cabinet holds an 8-gallon mix container, a slide-out mix shelf, and a non-contact mix-pump system.
- Proprietary auger design gently folds mix and prevents product breakdown, producing a smoother, creamier product.
- Splash shield for safety and to control spray for fast and easy clean-up.
- Dispensing and mixing product is accomplished with a single front-mounted handle for fastest speed of service.
- The IntelliTec™ control features a display which communicates with the operator for worry-free operation. (NAFEM Data Protocol capable)
- Built for consistent control of all mixes, including low-fat, low-sugar mixes.
- Ideal choice for locations where space is an issue.
- Adjustable speed on the mixer.
- Optional bag connection system minimizes potential mix contamination sources.



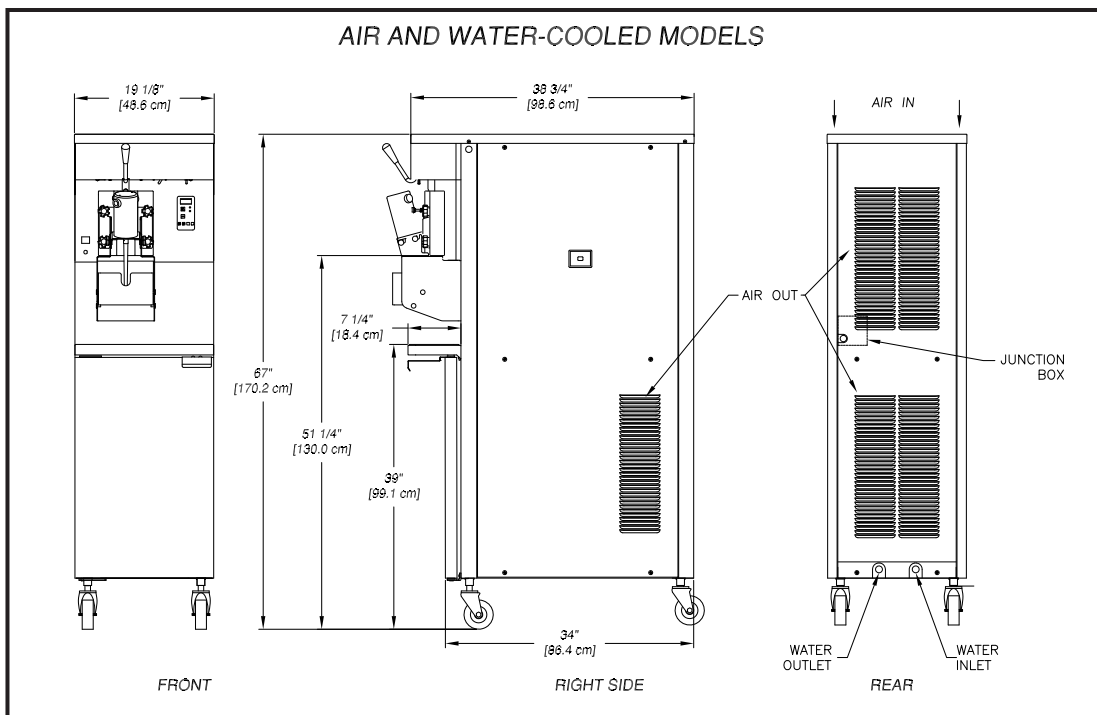

Model SU412									
Dimensions	<table border="0" style="width: 100%;"> <tr> <td style="text-align: center;">Machine</td> <td style="text-align: center;">with crate</td> </tr> <tr> <td style="text-align: center;">width</td> <td style="text-align: center;">27" (68,6 cm)</td> </tr> <tr> <td style="text-align: center;">height</td> <td style="text-align: center;">78" (198,1 cm)</td> </tr> <tr> <td style="text-align: center;">depth</td> <td style="text-align: center;">48" (121,9 cm)</td> </tr> </table>	Machine	with crate	width	27" (68,6 cm)	height	78" (198,1 cm)	depth	48" (121,9 cm)
Machine	with crate								
width	27" (68,6 cm)								
height	78" (198,1 cm)								
depth	48" (121,9 cm)								
Weight	450 lbs (204,1 kg) 650 lbs (294,8 kg)								
*Electrical	1 Phase, 208-240 VAC, 60Hz								
circuit ampacity	19A minimum								
overcurrent protection device	30A maximum								
Compressor	11,000 Btu/hr Scroll™ Compressor								
Drive Motor	3/4 hp								
Air Flow	Air cooled units require 3" (7,6 cm) air space on both sides, 6" back.								
Plumbing Fittings	Water cooled units require 1/2" N.P.T. water and drain fittings. Maximum water pressure of 130 psi. Minimum water flow rate of 3 GPM. Ideal EWT of 50°-70°F								
Hopper Volume	8 gallons (30,29 liters)								
Freezing Cylinder Volume	2.1 gallon (7,95 liters)								

Continuous research leads to ongoing product improvements; therefore, these specifications are subject to change without notice and should not be used as installation specifications.

* Machine requires a dedicated electrical circuit.

Distributed by:



FOODSERVICE EQUIPMENT

502 Highway 67 • Kiel, WI 53042-1600

920-894-2293 • 800-558-5807

Fax: 920-894-7029

E-mail: foodservice@stoelting.com

www.stoeltingfoodservice.com

ISO 9001:2008 Registered

Certified, Listed and/or Recognized by:



STMF-112 02/12